




NYPRO

NYPRO is a double braided rope constructed with a 100% nylon cover and a 100% multifilament polypropylene core. It is designed for marine, industrial, and electric utility use where controlled elongation, abrasion resistance, and low weight are desired. Nypro is fully spliceable and easy to handle.

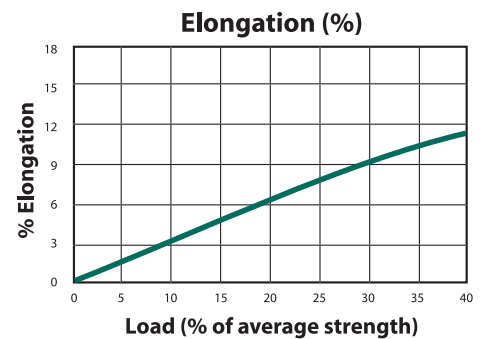

Size			Approx. Weight		Approx. Ave. Tensile Strength	
Dia. In	Dia. MM	Circ. Inch	Lbs./100 ft	Kg/100 M	Lbs.	Kg
1/4"	6	3/4"	1.5	2.3	2,190	994
5/16"	8	1"	2.4	3.6	3,100	1,407
3/8"	10	1 1/8"	3.4	5.1	4,000	1,816
7/16"	11	1 1/4"	4.5	6.7	5,500	2,497
1/2"	12	1 1/2"	5.9	8.8	7,250	3,292
9/16"	14	1 3/4"	8.2	12.2	10,000	4,540
5/8"	16	2"	10.2	15.2	12,700	5,766
3/4"	18	2 1/4"	13.2	19.7	16,000	7,264
7/8"	22	2 3/4"	19.7	29.3	23,800	10,805
1"	24	3"	25.0	37.2	28,200	12,803
1 1/8"	28	3 1/2"	33.3	49.6	38,000	17,252
1 1/4"	30	3 3/4"	37.0	55.1	43,500	19,749
1 5/16"	32	4"	39.0	58.1	49,250	22,360
1 1/2"	36	4 1/2"	53.0	78.9	61,300	27,830
1 5/8"	40	5"	63.0	93.8	74,300	33,732
1 3/4"	44	5 1/2"	73.0	108.7	92,400	41,950
2"	48	6"	95.4	142.1	106,000	48,124

Features:

- Specific Gravity of 1.01
- Controlled Elongation
- High Strength
- Abrasion Resistant
- Easy Handling
- Fully Spliceable

Suggested Uses:

- Dock Lines
- Anchor Lines
- Tie Down Lines



Manufactured by Novatec Braids Ltd.
234 Water Street, Yarmouth
Nova Scotia, Canada B5A 4P8



www.novabraid.com
1-800-565-4212