




## NOVAGOLD™



**NOVAGOLD™** is our premium double braided nylon rope designed for general marine, industrial, and commercial use where controlled elongation, high strength, and abrasion resistance are required. It is constructed from the highest quality yarns to resist mildew, rot, and most chemicals. Novagold's balanced core and cover construction insure easy splicing. It can be easily identified by a single gold tracer in the cover. Diameters over 1" are solid white.

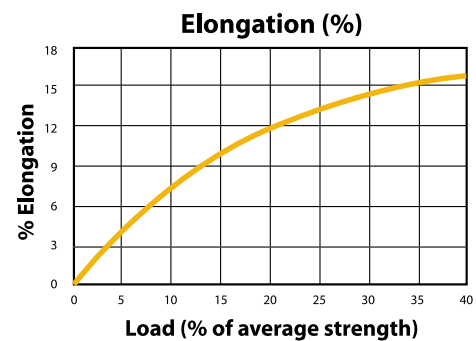

Size			Approx. Weight		Approx. Ave. Tensile Strength	
Dia. In	Dia. MM	Circ. Inch	Lbs./100 ft	Kg/100 M	Lbs.	Kg
1/4"	6	3/4"	1.7	2.5	2,400	1,090
5/16"	8	1"	2.6	3.9	3,400	1,544
3/8"	10	1 1/8"	3.7	5.5	5,000	2,270
7/16"	11	1 1/4"	5.0	7.4	6,500	2,951
1/2"	12	1 1/2"	6.4	9.5	8,000	3,632
9/16"	14	1 3/4"	8.4	12.5	11,800	4,994
5/8"	16	2"	12.0	17.9	14,800	6,719
3/4"	18	2 1/4"	16.0	23.8	19,000	8,626
7/8"	22	2 3/4"	21.8	32.5	28,000	12,712
1"	24	3"	26.0	38.7	33,500	15,209
1 1/8"	28	3 1/2"	35.8	53.3	45,000	20,430
1 1/4"	30	3 3/4"	41.0	61.1	52,000	23,608
1 5/16"	32	4"	46.8	69.7	59,000	26,786
1 1/2"	36	4 1/2"	59.8	89.1	74,000	33,596
1 5/8"	40	5"	74.0	110.2	91,500	41,541
1 3/4"	44	5 1/2"	89.0	132.6	111,000	50,394
2"	48	6"	106.0	157.9	131,000	59,474

### Features:

- Specific Gravity of 1.14
- High Energy Absorption
- Controlled Elongation
- High Strength
- Abrasion Resistance
- Mildew Resistance
- Urethane Coated Cover Available

### Suggested Uses:

- Mooring Lines
- Anchor Lines
- Kinetic Lines
- Tow Lines

Meets or exceeds (upon request) U.S. MIL Spec # MIL-R-24050D  
 CDN MIL Spec #40-GP-16M

Manufactured by Novatec Braids Ltd.  
 234 Water Street, Yarmouth  
 Nova Scotia, Canada B5A 4P8



[www.novabraid.com](http://www.novabraid.com)  
 1-800-565-4212