




NYTEC-12

NYTEC-12 is a hollow braided 12-strand rope using 100% nylon yarn. It is designed with single ply construction up to 1" nominal size and two ply in larger diameters. Available in solid white or solid black, it is fully spliceable and resistant to most chemicals.

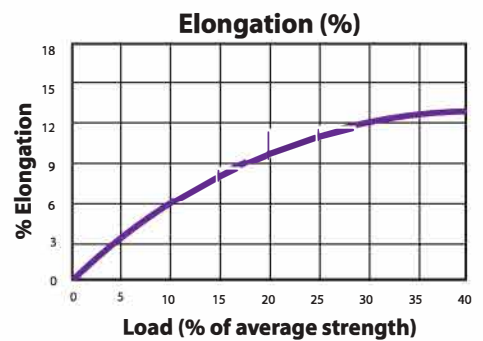

Size			Approx. Weight		Approx. Ave. Tensile Strength	
Dia. In	Dia. MM	Circ. Inch	Lbs./100 ft	Kg/100 M	Lbs.	Kg
1/4"	6	3/4"	2.0	3.0	2,350	1,067
5/16"	8	1"	3.0	4.5	3,500	1,589
3/8"	10	1 1/8"	3.9	5.8	5,200	2,361
7/16"	11	1 1/4"	4.8	7.1	7,100	3,223
1/2"	12	1 1/2"	6.7	10.0	9,200	4,177
9/16"	14	1 3/4"	8.7	13.0	11,800	5,357
5/8"	16	2"	11.5	17.1	14,600	6,628
3/4"	18	2 1/4"	15.0	22.3	18,600	8,444
7/8"	22	2 3/4"	23.0	34.3	28,000	12,712
1"	24	3"	26.5	39.5	32,500	14,755
1 1/8"	28	3 1/2"	34.0	50.6	41,500	18,841
1 1/4"	30	3 3/4"	40.0	59.6	48,300	21,928
1 5/16"	32	4"	55.5	82.7	55,400	25,152
1 1/2"	36	4 1/2"	57.0	84.9	69,500	31,553
1 5/8"	40	5"	68.0	101.3	83,000	37,682
1 3/4"	44	5 1/2"	79.0	117.7	96,800	43,947
2"	48	6"	96.0	143.0	117,000	53,118

Features:

- Specific Gravity of 1.14
- Non-Rotating
- High Strength
- Controlled Elongation
- Easy Flaking or Coiling
- Chemical Resistant

Suggested Uses:

- Slings
- Mooring Lines
- Anchor Lines



Manufactured by Novatec Braids Ltd.
234 Water Street, Yarmouth
Nova Scotia, Canada B5A 4P8



www.novabraid.com
1-800-565-4212