




Novabraid





Electric Fence

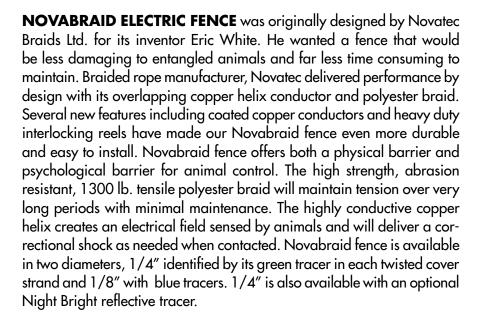

Diameter		Net Weight/Reel		Ft./m.	Average Tensile Strength	
Inch	mm	Lbs.	Kg.		Lbs.	Kg.
1/8"	3.2	11.2	5.1	1312/400	650	295
1/4"	6.4	22.4	10.2	1312/400	1300	590

Minimum Tensile can be calculated per CI 2002-01 as Avg. Tensile less 10%




Manufactured by Novatec Braids Ltd. 234 Water Street, Yarmouth Nova Scotia, Canada B5A 4P8









Features:

- High Strength
- High Visibility
- Low Elongation
- **UV Light Resistant**
- Low Maintenance
- Weather Resistant
- **Abrasion Resistant**
- **Highly Conductive**
- 400 Meter Lengths
- Coated Copper Wire
- Interlocking Reel Flanges
- Heavy Duty Pay Off Reels
- Requires Fewer Fence Posts
- Overlapping Conductor Helix

• 25 Year Limited Warranty

www.novabraid.com 1-800-565-4212