




OLETEC-12™



OLETEC-12™ is a hollow braided 12 strand rope using 100% polyolefin high tenacity co-polymer fiber. It is designed with single or two ply construction depending upon nominal size. Oletec 12 is designed for commercial and marine applications where an easily handled, high strength, floating rope is required. It has excellent abrasion resistance, will not mildew or rot, and is easily spliced.

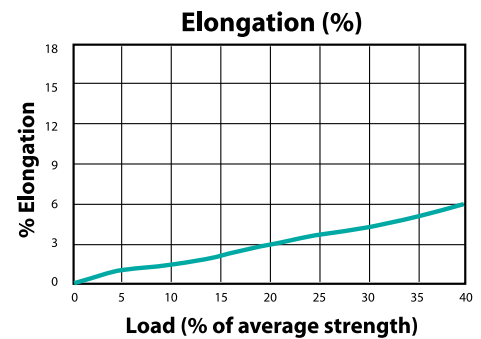

Size			Approx. Weight		Approx. Average Tensile Strength	
Dia. In	Dia. MM	Circ. Inch	Lbs./100 ft.	Kg/100 M	Lbs.	Kg.
1/4**	6	3/4"	1.1	1.6	1,500	681
5/16"	8	1"	1.7	2.5	2,400	1,090
3/8"	10	1 1/8"	2.7	4.0	3,500	1,589
7/16"	11	1 1/4"	3.5	5.2	4,400	1,998
1/2"	12	1 1/2"	4.9	7.3	6,000	2,724
9/16"	14	1 3/4"	6.8	10.1	8,000	3,632
5/8"	16	2"	8.7	13.0	9,900	4,495
3/4"	18	2 1/4"	10.9	16.2	12,000	5,448
7/8"	22	2 3/4"	14.4	21.4	15,800	7,173
1"	24	3"	20.5	30.5	21,000	9,534
1 1/8"	28	3 1/2"	25	37.2	26,000	11,804
1 1/4"	30	3 3/4"	27.4	40.8	28,500	12,939
1 5/16"	32	4"	32	47.7	32,800	14,891
1 1/2"	36	4 1/2"	40	59.6	40,000	18,160
1 5/8"	40	5"	51	76.0	50,000	22,700
1 3/4"	44	5 1/2"	59	87.9	58,000	26,992
2"	48	6"	72	107.2	69,000	31,326

* 1/4" Oletec only available with 8 strand construction

Oletec-12 meets or exceeds dielectric requirements per ASTM F1701-12 Live Line Rope Std

Features:

- Non-Rotating
- Torque Free
- Lightweight
- High Strength
- UV Stabilized
- High Dielectric
- High Visibility
- No Water Absorption
- Specific Gravity of 0.99

Suggested Uses:

- General Marine
- Floating Towline
- Commercial Marine
- High Dielectric Winch Lines & Safety Lines



Manufactured by Novatec Braids Ltd.
234 Water Street, Yarmouth
Nova Scotia, Canada B5A 4P8



www.novabraid.com
1-800-565-4212